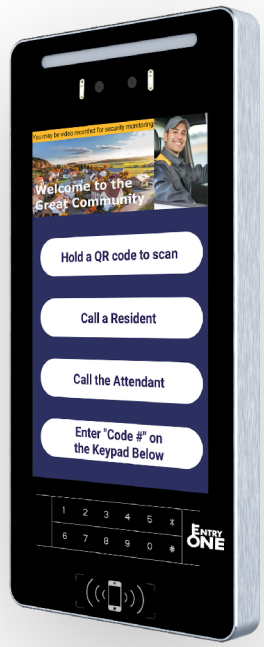

Verentry 10

10-inch Cloud Visitor Kiosk

SMART KIOSK FOR GATES & LOBBIES

- 10" high-brightness, multi-touch display with adaptive dimming + backlight
- Dual-camera + IR liveness for fast, reliable Face ID
- **Face enforcement option:** require a face in-frame before code entry
- **App-less visitor verification:** SMS link with visitor image/live view (patent pending)
- **Cloud directory + guest passes:** QR, temporary codes, and optional facial ID

SUPPORTED ACCESS MODALITIES

Facial Recognition | Mobile (BLE) | 13.56 MHz Cards (CSN) | PIN / Keypad | QR Guest Pass | Multi-Factor (Optional)

Directory & calling

- **Cloud-managed directory:** search by address or resident name (First name + Last initial)
- **Call routing:** rings to resident phone (cell or app)
- **Remote open:** DTMF open during call and SMS verification link

Guest passes

- **Temporary codes:** 6-digit codes for guests and vendors
- **QR passes:** scan at kiosk for quick entry
- **Optional facial ID:** issue Face ID credentials for recurring visitors

Specifications subject to change.

Technical specifications

Specification	Value
Display	10" high-brightness, multi-touch display with adaptive dimming + backlight
Dimensions	H 14 1/4" × W 6 7/8" × D 1 1/4"
Biometrics	Dual-camera + IR liveness for fast, reliable Face ID
Face enforcement	Require a face in-frame before code entry (optional)
Visitor verification	SMS link with visitor image/live view (no app required) (patent pending)
Directory & guest passes	Cloud directory; QR, temporary codes, and optional facial ID
Connectivity	Ethernet or built-in cellular (SIM) depending on configuration
Power	12V DC input (24V option planned)
SIP	Optional SIP support for PBX/VoIP integrations (configuration dependent)
FCC ID	2BS64-VE10T (Models: Verentry10T, Verentry10S, Verentry5C)

Form factors & deployment

Verentry 10T
10" tablet kiosk for gates & lobbies. Ethernet or built-in cellular (SIM) options.

Verentry 10S
Stainless retrofit enclosure option for replacing legacy stainless call-box / pedestal cutouts.

- **Compact option:** Verentry 5C compact kiosk (separate datasheet) for space-limited installs.
- **Connectivity:** Ethernet or built-in cellular (SIM) depending on configuration
- **Power:** 12V DC input (24V option planned)

Intercom & verification

- Directory calls ring to the resident's phone (app or standard call routing)
- SMS verification link provides visitor image/live view—no app required (patent pending)
- Remote admit: DTMF open during call plus secure SMS decision link
- Optional SIP support for PBX/VoIP integrations (configuration dependent)

Compliance & legal notice

Use of facial recognition, audio/video recording, and biometric data collection is subject to state and local regulations; customers are responsible for compliance. Power sourcing and installation practices may be subject to UL 294 / UL 62368 requirements and local codes.

FCC

FCC ID:
2BS64-VE10T
(Models: Verentry10T, Verentry10S, Verentry5C). This device operates under FCC Part 15. It must not cause harmful interference and must accept interference received (which may cause undesired operation). Changes not approved by the responsible party may void authority to operate.

Specifications subject to change.